


Product features PR 139

Width [mm]:	20.0
Height [mm]:	50.0
Base height [mm]:	2.3
Alloy	AlMgSi 0,5 F22
Weight per meter [kg/m]:	1.08

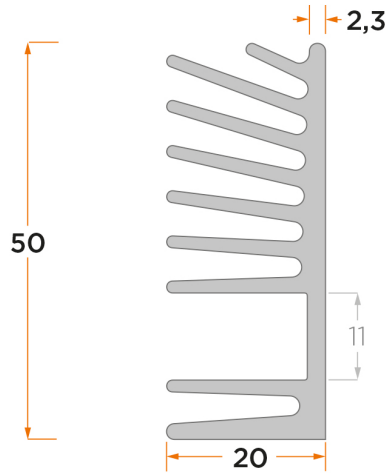

Further information

Extruded heat sink profile for screw-on mounting Surface: AL= Untreated aluminium, SE= anodised black, NE= anodised colourless, CR Chromated- colourless (Chrom6-free, RoHS conform) Alloy: AlMgSi 0,5 F22 Standard tolerances (if not otherwise required): Extrusion tolerances for aluminium profiles: DIN 1748 - section 4 and DIN 17615 - section 3 respectively. DIN ISO 755 - 9 and DIN ISO 12020 - 2 respectively. Machining tolerance: DIN 2768 m Finishing to your specification Length, milling, surface refinement, including mounting-, insulation-, thermal interface accessories

Thermal performance

PV [W]	RthK [K/W]			
5.0	7.6	6.6	5.5	4.7
10.0	6.7	5.8	4.8	4.1
15.0	6.1	5.3	4.5	3.8
20.0		5.0	4.2	3.6
25.0			4.0	3.5
Length in mm	37.5	50.0	75.0	100.0

