


## Product features PR 140

Width [mm]:	105.0
Height [mm]:	19.0
Base height [mm]:	4.6
Alloy	AlMgSi 0,5 F22
Weight per meter [kg/m]:	1.93

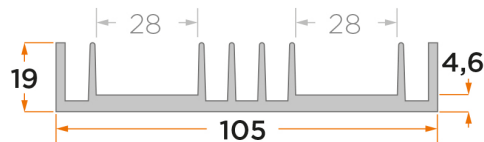

## Further information

Extruded heat sink profile with 2 counter-sunk mounting areas  
Surface: AL= Untreated aluminium, SE= anodised black, NE= anodised colourless, CR Chromated- colourless (Chrom6-free, RoHS conform) Alloy: AlMgSi 0,5 F22 Standard tolerances (if not otherwise required): Extrusion tolerances for aluminium profiles: DIN 1748 – section 4 and DIN 17615 – section 3 respectively. DIN ISO 755 – 9 and DIN ISO 12020 – 2 respectively. Machining tolerance: DIN 2768 m Finishing to your specification Length, milling, surface refinement, including mounting-, insulation-, thermal interface accessories

## Thermal performance

PV [W]	RthK [K/W]		
	50.0	75.0	100.0
10.0	3.16	2.83	2.42
20.0	3.06	2.52	2.19
30.0	2.78	2.32	2.04
40.0		2.19	1.94
50.0			1.85
<b>Length in mm</b>	<b>50.0</b>	<b>75.0</b>	<b>100.0</b>

