


Product features PR 23

Width [mm]:	29.0
Height [mm]:	12.0
Base height [mm]:	3.0
Alloy	AlMgSi 0,5 F22
Weight per meter [kg/m]:	0.40

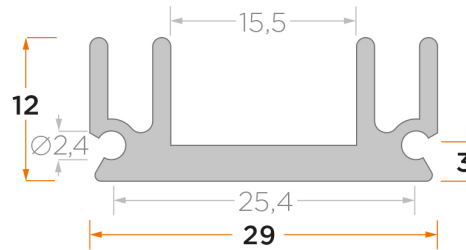

Further information

Extruded heat sink profile with counter-sunk mounting area
Surface: AL= Untreated aluminium, SE= anodised black, NE= anodised colourless, CR Chromated- colourless (Chrom6-free, RoHS conform) Alloy: AlMgSi 0,5 F22 Standard tolerances (if not otherwise required): Extrusion tolerances for aluminium profiles: DIN 1748 – section 4 and DIN 17615 – section 3 respectively. DIN ISO 755 - 9 and DIN ISO 12020 - 2 respectively. Machining tolerance: DIN 2768 m Finishing to your specification Length, milling, surface refinement, including mounting-, insulation-, thermal interface accessories

Thermal performance

PV [W]	RthK [K/W]			
2.0	17.9	14.9	11.9	9.7
5.0	13.1	10.9	8.7	7.2
8.0	11.6	9.7	7.7	6.3
10.0		9.7	7.7	6.3
12.0			7.7	6.3
Length in mm	37.5	50.0	75.0	100.0

