


Product Data Sheet Type: PR25

Group: HEATSINKS Extrusions

Miscellaneous profiles

Width : 32 mm
 Height : 20 mm
 Base height : 4 mm

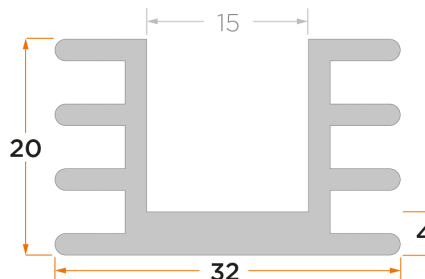

Surface: AL= Untreated aluminium, SE= anodised black, NE= anodised colourless, CR Chromated- colourless (Chrom6-free, RoHS conform)
 Alloy: AlMgSi 0,5 F22

Standard tolerances (if not otherwise required):

Extrusion tolerances for aluminium profiles: DIN 1748 – section 4 and DIN 17615 – section 3 respectively. DIN ISO 755 – 9 and DIN ISO 12020 – 2 respectively.

Machining tolerance: DIN 2768 m



Finishing to your specification

Length, milling, surface refinement, including mounting-, insulation-, thermal interface accessories

Additional information:

Measurement conditions for the values in the thermal diagram are described at 'www.alutronic.com/service/thermal-measurments'

General information for designing your heat sink solution you will find at 'www.alutronic.com/service/technical-information'

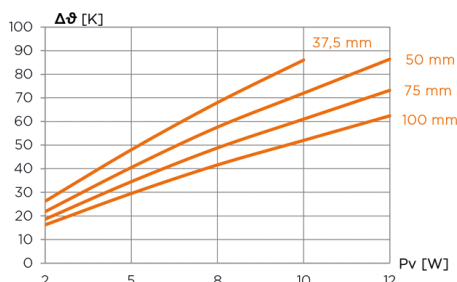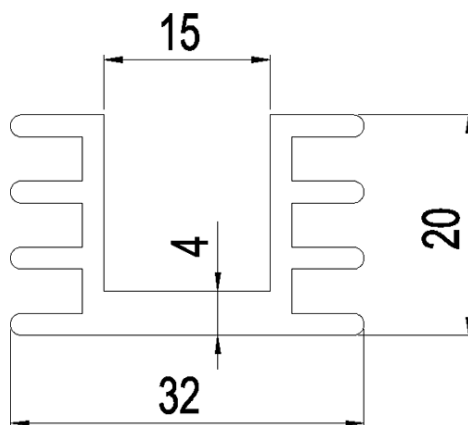

Pv [W]	RthK [K/W]			
2	13,1	10,9	9,3	8,1
5	9,6	8,1	6,9	5,9
8	8,5	7,2	6,1	5,2
10	8,6	7,2	6,1	5,2
12		7,2	6,1	5,2
mm	37,5	50	75	100
kg/m	0,65			