


## Product Data Sheet Type: SI7009-S

Group: ACCESSORIES Thermal Interface Material

Silicone washers

Electrical insulating :	2,5 kV
Thickness :	0,18
Dielectric coefficient :	2,56 at 1MHz
Minimum thermal resistance :	1,3 K/W
Device mounted by :	Screw
Material :	Silicon w. Glasfibre

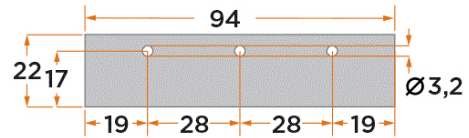

Glass fiber reinforced silicone foil in combination with bushes facilitate insulated mounting of semiconductors e.g. on heatsinks. They are highly flexible and ensure optimal heat conductivity even without using thermal compounds.

- Custom designed in all configurations (on request).
- Cost saving assembly of different components onto a common insulator wafer.
- self-adhesive on one side
- Thickness: 0,18mm
- Dielectric strength: app. 4 kV
- Dielectric constant: 2,56 (by 10<sup>6</sup> Hz)
- Hardness: (Test ASTM D 2240) 85 Shore A
- Elongation: (Test ASTM D 412) 2%
- Colour: grey
- Tolerance: +/-0,02mm
- Temperature range: -60 / +200 °C
- Thermal Conductivity: 0,9 W / mK
- UL listed