


Product Data Sheet Type: LK20/200/A

Group: HEATSINKS Active Elements

Lamella cooled units

Width : 182 mm
 Height : 80 mm
 Length : 278 mm
 Weight : 4046g
 Surface :

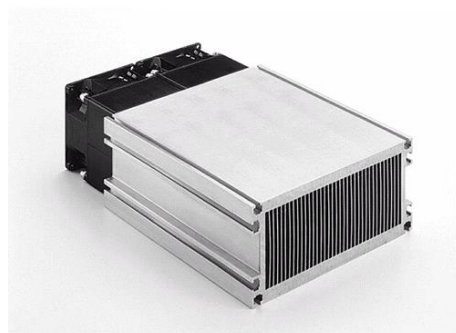

Cooling units for high power serie LK have been developed for forced cooling with reasonable fans.

Caused by new lamella design now an optimal relation of the material to distributed load performance is possible; independent of the technical limits for extrusions.

For mounting semiconductors modules there are two mounting surfaces.

The technical data refer to one flat milled surface by distributed load and free blowing operation.

For double side device mounting the other side can also be milled flat.

For corrosion protection all aluminium elements are chromated (RoHS-conformm).

Height and breadth of the lamella cooled units are in accordance to the commercial fans.

The length can be varried in the limit given by the air volume of the fan.

The shown standard versions have been optimatied by computer calculations with the fan data.

Special design, adapted to your construction data, is possible.

Test samples can be made in short time. Also a computer supported calculation is possible by an adequate requirement.

Technical data:

- Dissipated power PV at D J = 40 K:4200 W
- Maximum thermal resistance Rth max.: 0,1 K/W
- Minimum thermal resistance Rth min.: 0,07 K/W
- Material of cooled unit: AlMgSi 0,5 F 22

